
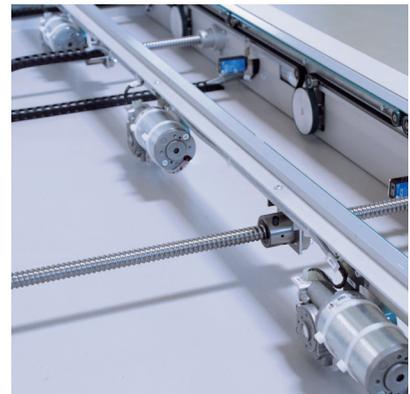


VEGO BCO 03

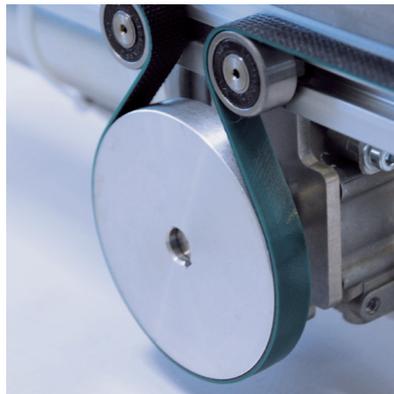

Description


Edge belt conveyor system with three 530 mm long conveyor segments for a total overall length of 1,590 mm. The conveyor is used as a connecting element between 2 machines in a production line or as the base for a workstation. The precise rail design allows quick and easy adjustment of the conveyor width using clamping levers. The powder coated steel frame ensures process stability and excellent durability.

Features

- _ Anti-static conveyor belts
- _ SMEMA Interface
- _ Start / Stop push button

Options

- _ Inspection function 0/1
- _ Adjustable handover speed
- _ Electrical width adjustment
- _ Transport height 850 mm \pm 50 mm
- _ Hinged dust cover 530 mm
- _ Hinged dust cover 530 mm, with Interlock
- _ Rail extension
- _ Stopper cylinder
- _ Scanner mounting bracket with trigger, topside
- _ Foot rest
- _ Scalloped work table
- _ Illumination unit

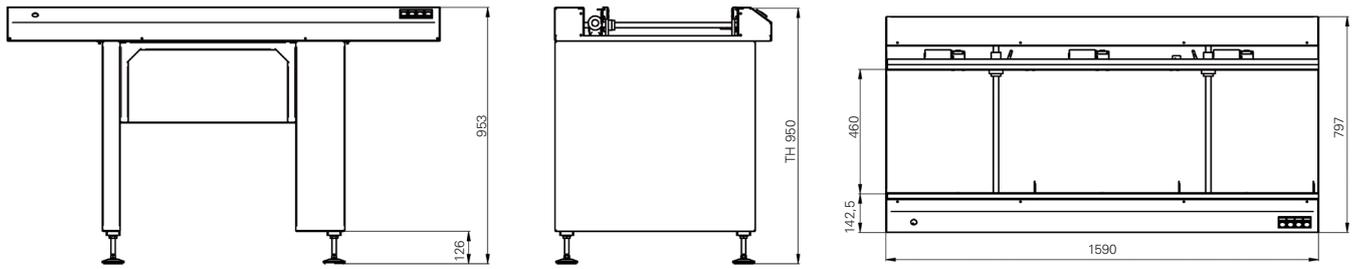

VEGO BCO 03

Machine Configuration

Transport height	950 mm ± 50 mm
Max. transport width	460 mm
Interface	SMEMA
Transfer direction	from left to right
Operating side	Front of the machine
Fixed rail	Front of the machine

Panel Dimensions

Panel length	70 to 460 mm
Panel width	50 to 460 mm
Panel thickness	0.8 to 4.5 mm
Component clearance	± 40 mm
Panel weight	to 3 kg

Installation Requirements

Power supply	230 V / 115 V, 50 / 60 Hz, ± 10%
Power supply system	L1 + N + PE
Power consumption	0,15 kW

Machine Description

Length x Width x Height	1590 x 797 x 953 mm
Netto weight	90 kg
Noise Level	< 75 dB

Upgrades

Control panel T70
 Control function 0/99^{a)}
 Automatic width adjustment^{a)}
 Good/Bad sorting
 Machine networking via IC Net
 Additional interface protocol

a) only with control panel T70